



Cut-out dimensions

BORA Pure range

Flush installation

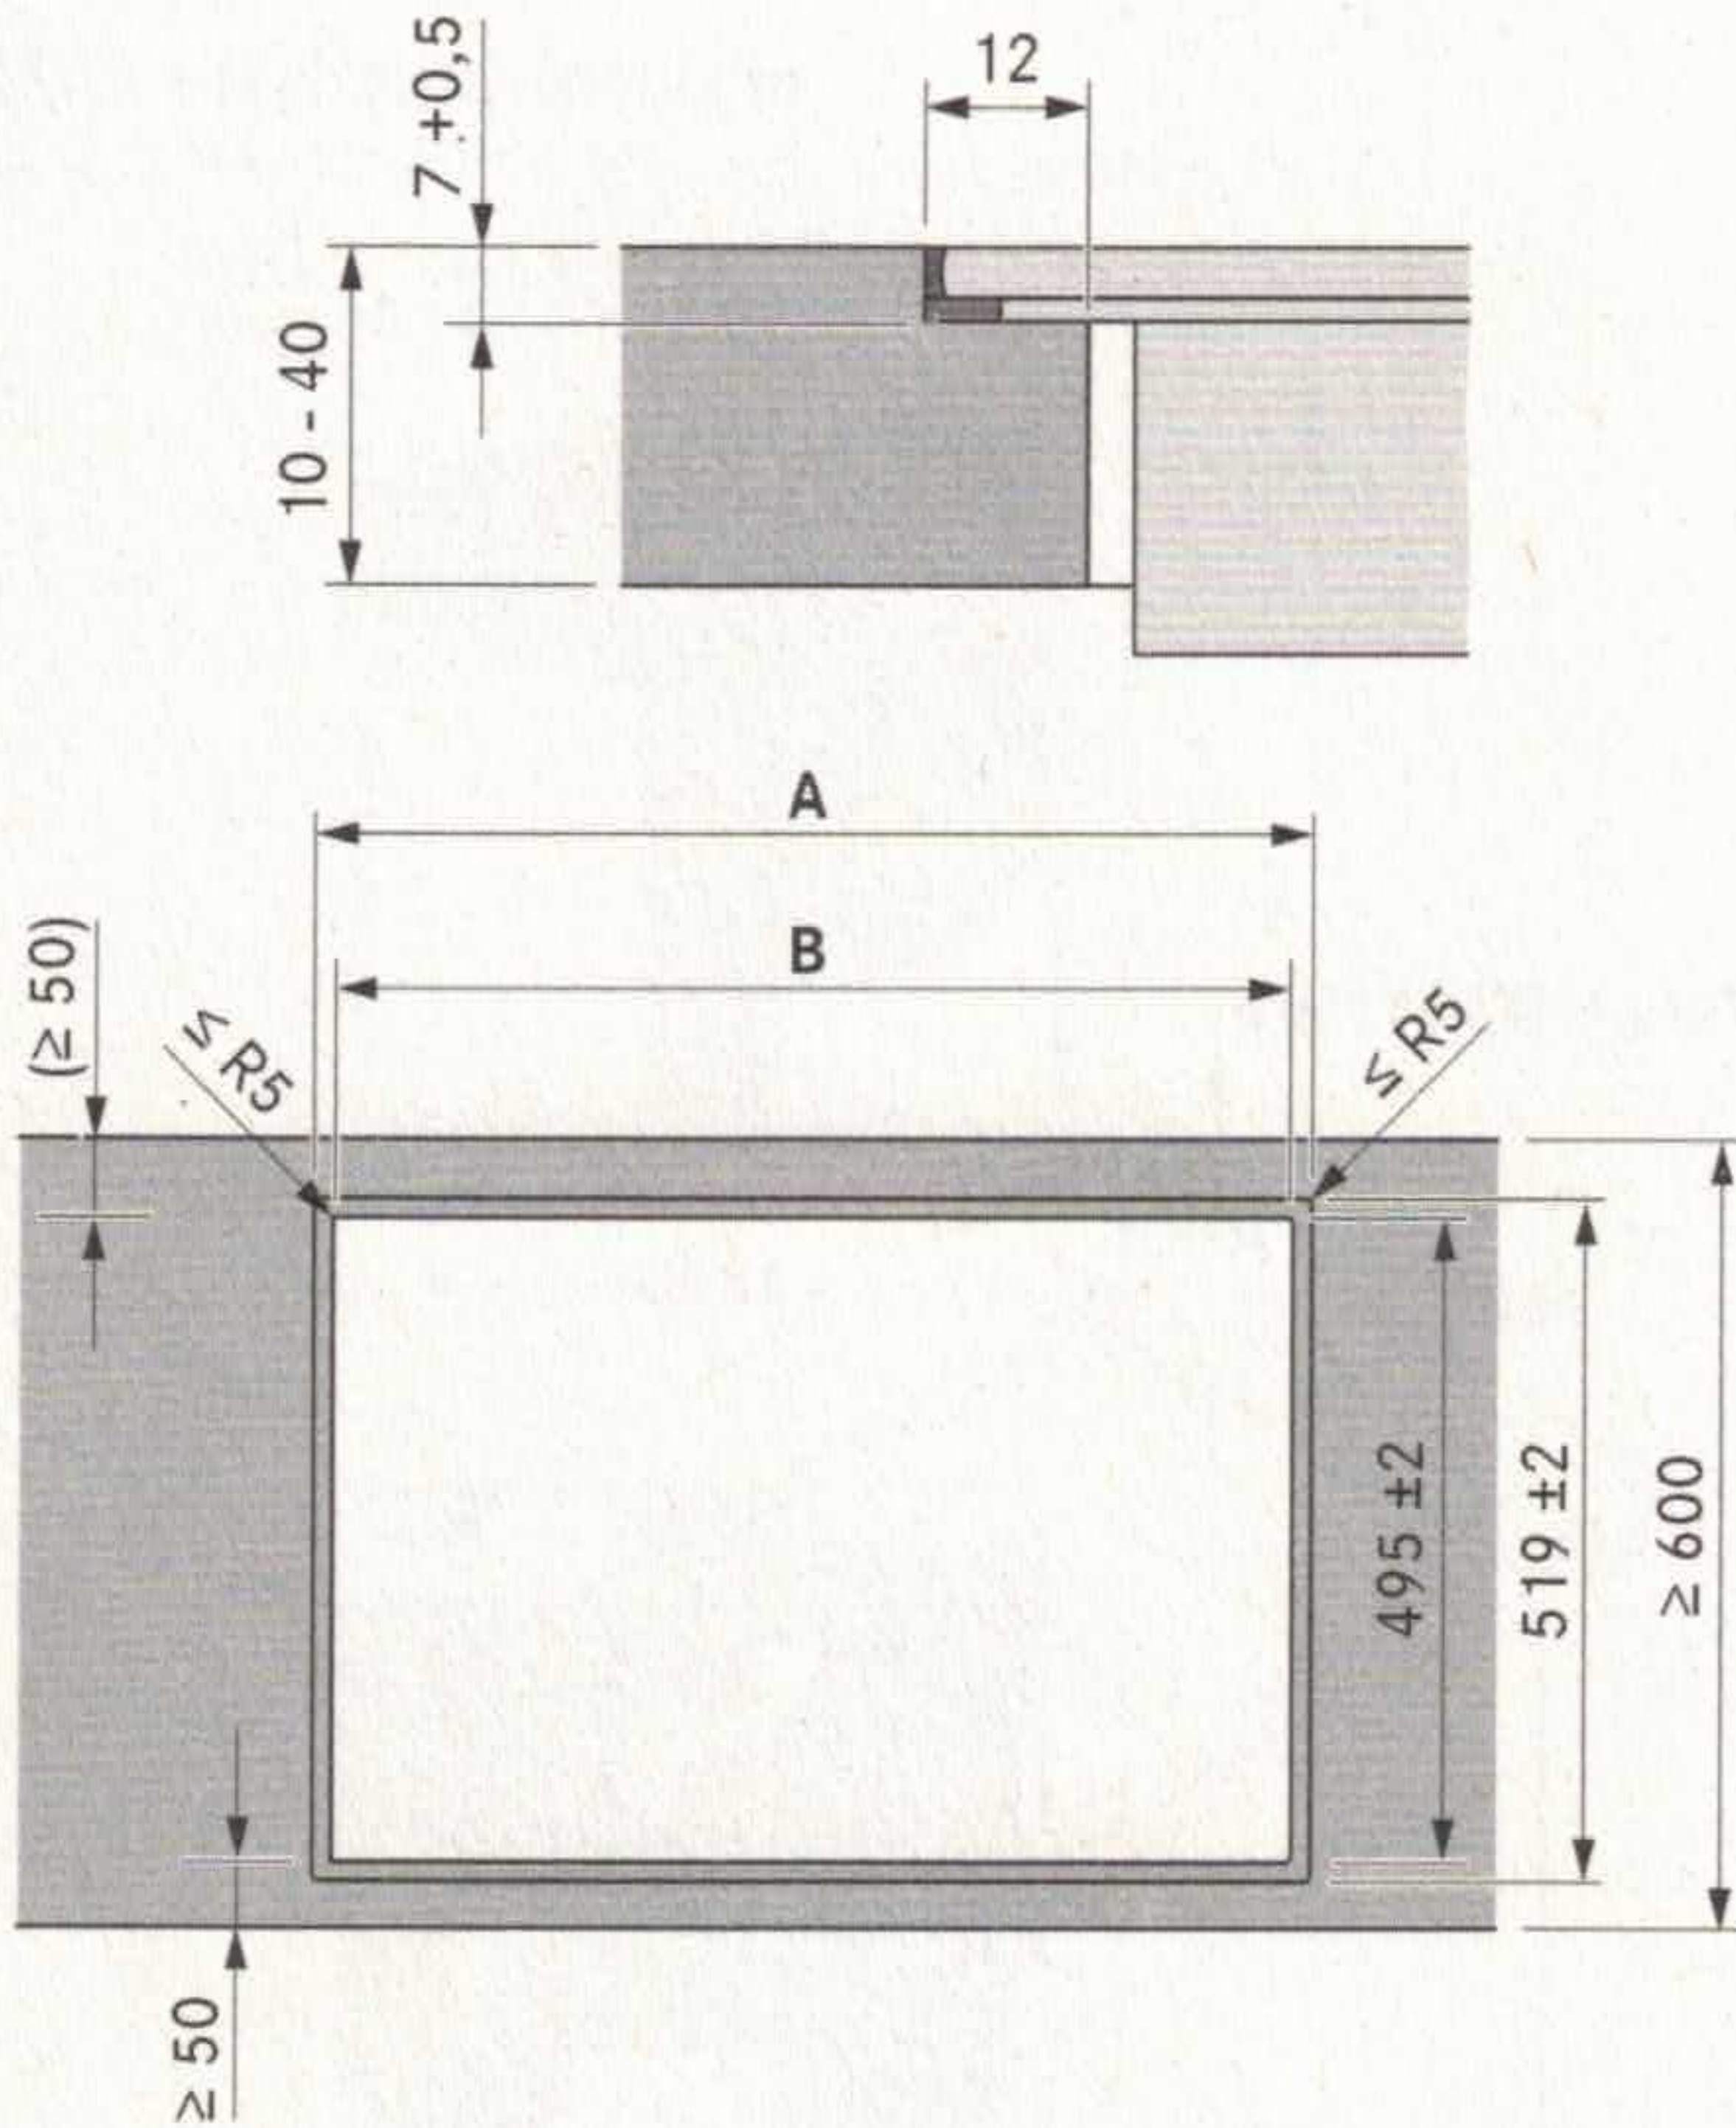

Surface mounting (with or without cooktop frame)

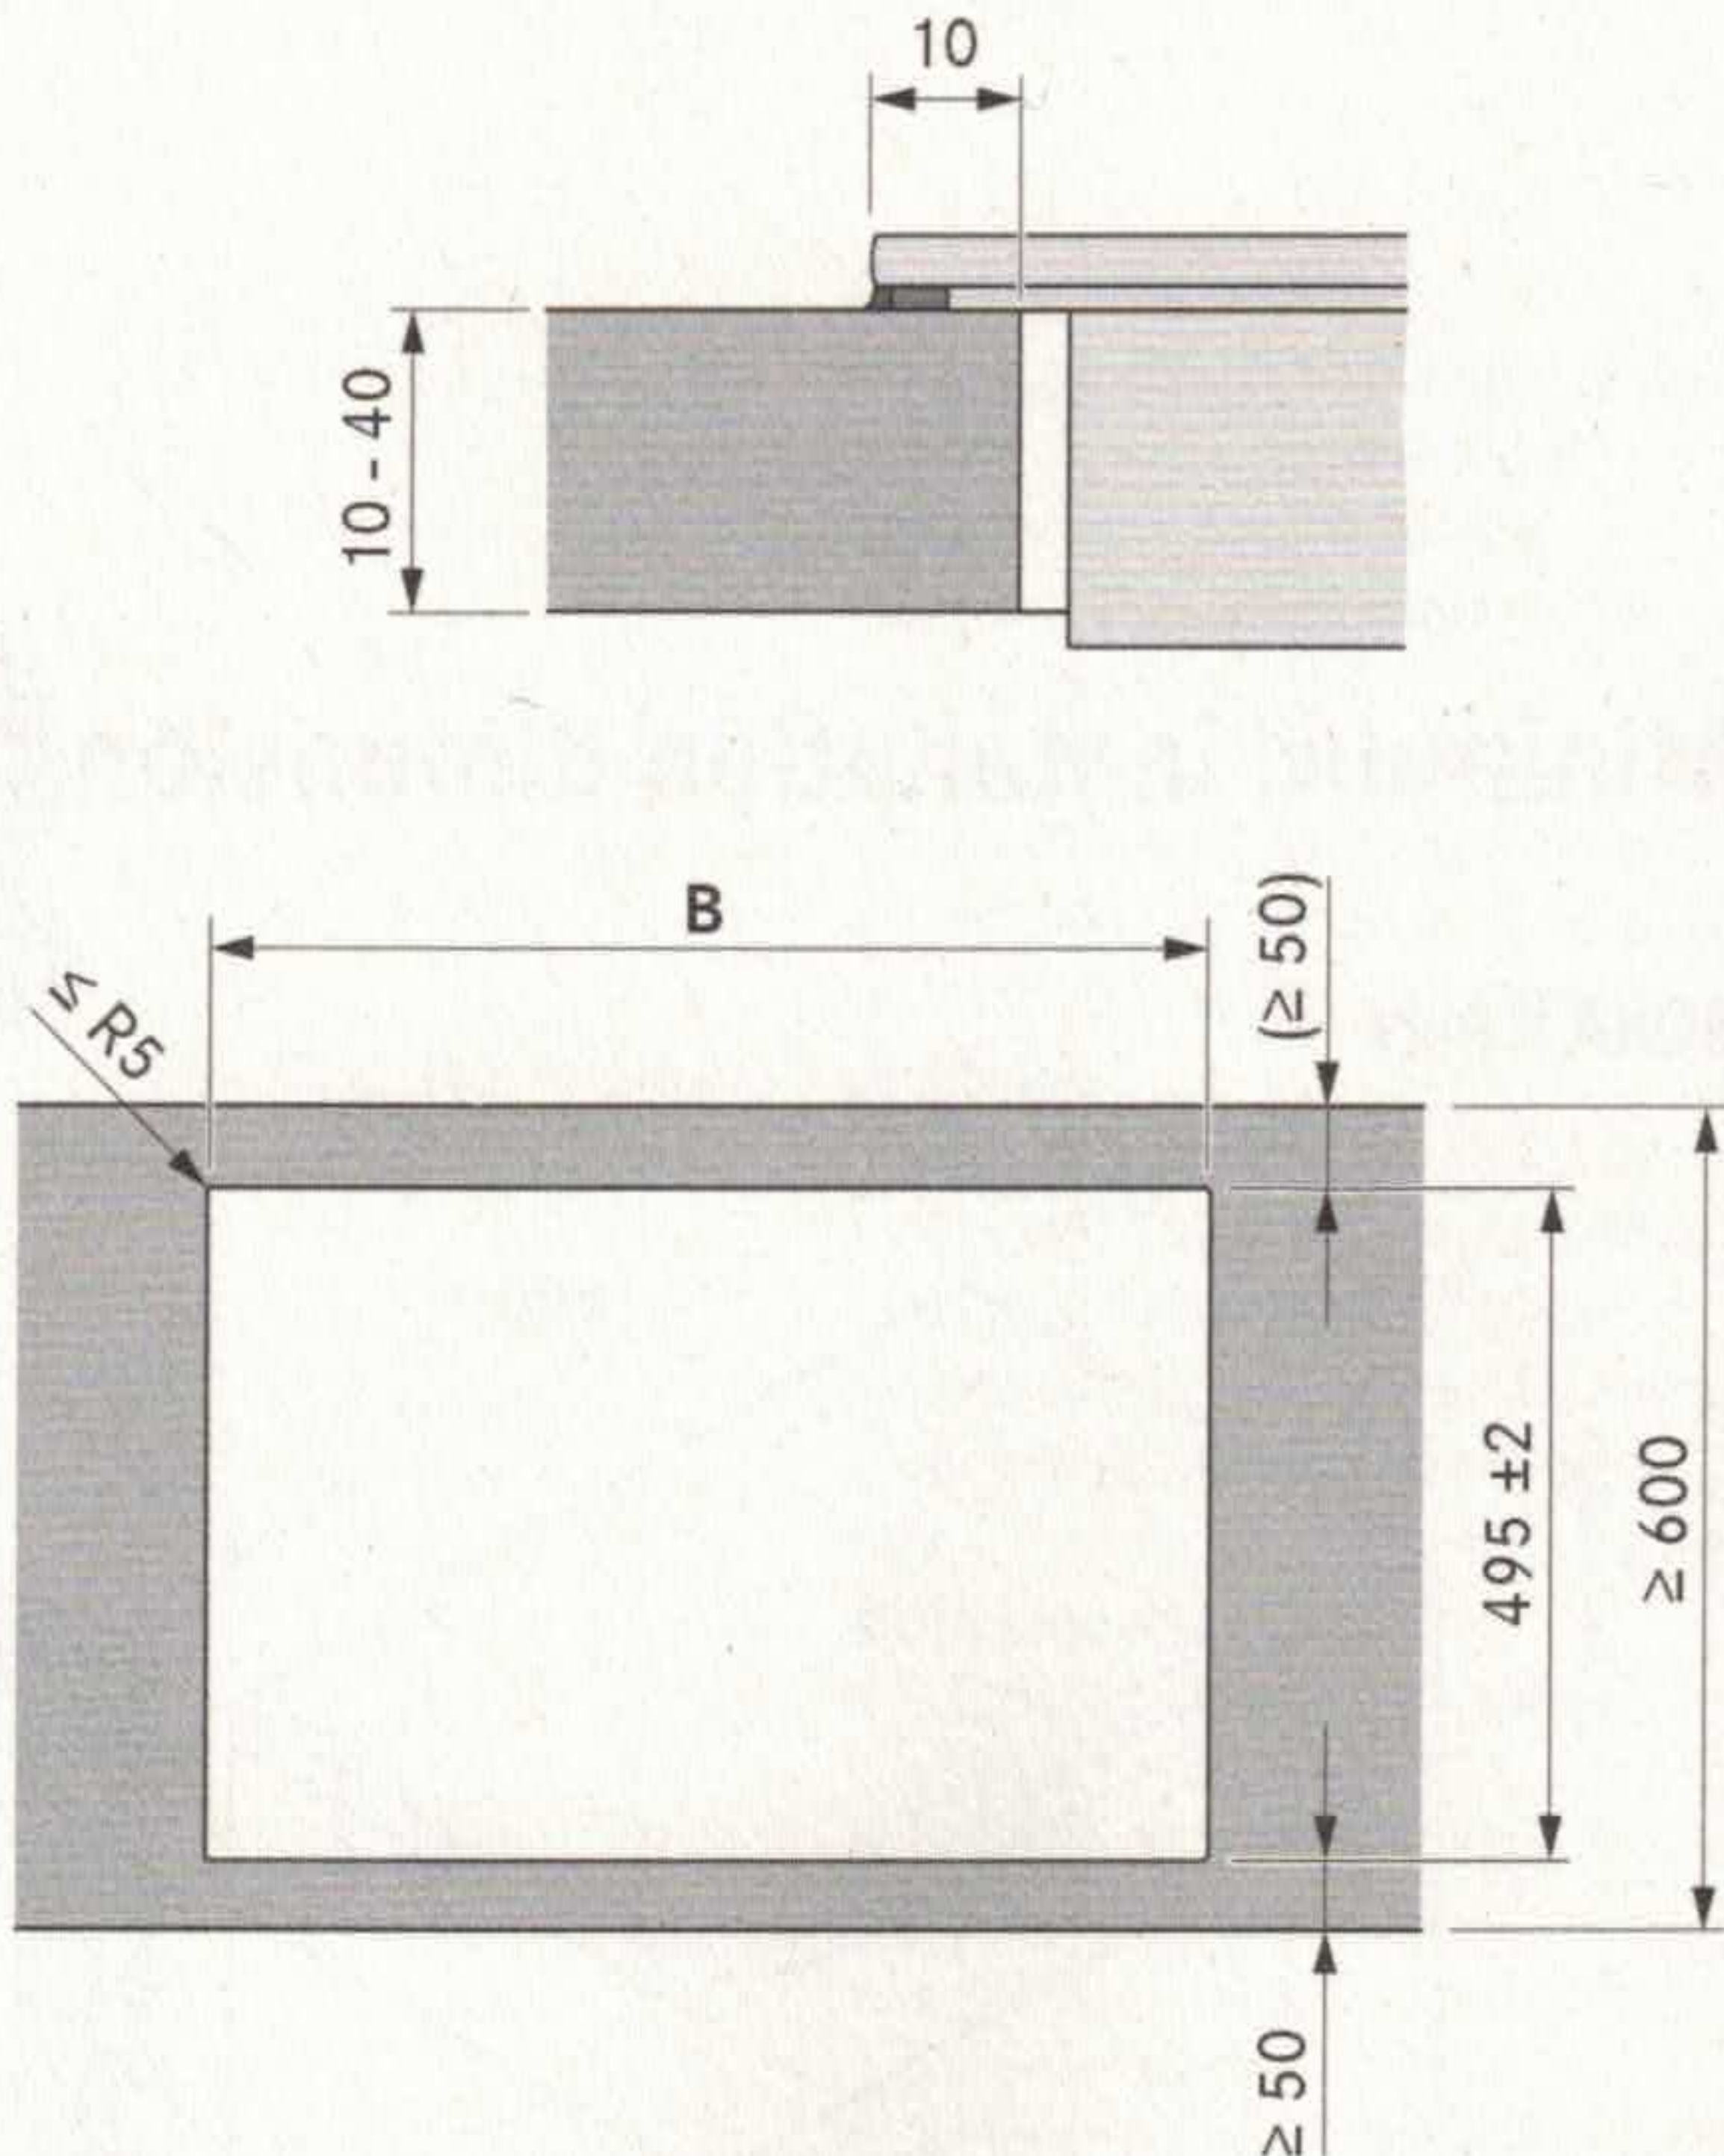

System	A in mm	B in mm
S Pure	584	560
Pure	764	740

System	A in mm	B in mm
M Pure	764	740
X Pure	834	810

Important planning information:

- The minimum measurement of 50 mm from the front edge of the worktop to the worktop cut-out is a recommendation from BORA.
- Cut-out dimension tolerance +/- 2 mm.
- Clearance of 2 mm should be provided around the built-in appliances.
- Please note the worktop manufacturer's instructions on the suitability of the worktop. Worktop cut-outs must be moisture-sealed using suitable means or, where necessary, fitted with a thermal insulator (e.g. in the case of Corian or HiMacs worktops).
- When installation is complete, the appliance is to be sealed in using heat-resistant silicone sealant.